

POWER YOUR FUTURE

SDEC Generator
LG280SD

6ETAA11.8-G21

Prime Power: 280KW/350KVA
Standby Power: 308KW/385KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.
Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

SDEC Series

28KVA--1000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel: +86-0593-6309773 Fax: +86-0593-6586988

E-mail: sales@longkaipower.com

Web: www.longkaipower.com

Technical Data

Model		LG280SD
Rated prime power	kva	350
Rated standard power	kva	385
Rated voltage line to line	V	400/230
Rated current	A	505
Maximun sound level	dB(@7m)	100

Engine-SDEC

Model		6ETAA11.8-G21
Aspiration	Inline, four strokes, four valves, water cooled, pressurized air cooled	
Fuel system	"P" type	
No. cylinders	6 in line	
Displacement	Liquid	11.8
Bore*Stroke	mm	128*153
Compression ratio	17:1	
Rated speed	r/min	1500
Rated net power(with fan)	Kw	307
Governor type	E	
Start Motor	V	24V×5.5kW

Exhaust System

Exhaust gas flow	m ³ /min	/
Exhaust gas temp	°C	600
Max back pressure	kPa	10

Aspiration System

Max inlet pressure	kPa	6
Air flow	m ³ /min	/
Fan consumption	KW	6

Fuel System

100% load(Prime power)	L/h	72.9
75% load(Prime power)	L/h	54.1
50% load(Prime power)	L/h	37
Fuel tank capacity	L	520

Lubrication System

Oil capacity	L	41
Oil consumption	g/kwh	≤4
Lub. Method	/	
(continuous operation)		

Cooling System

Coolant capacity	L	23.2
Thermostat operation range	°C	85-95
Max water temperature	°C	104

Alternator


Model		LONGKAI LK444E	STAMFORD HCI444E-S4L1D-E41/S4L1S-E4
Phase	3		
Voltage	V	400/230	
Wiring Type	3 Phase 4 wire, Y type		
Bearing	1		
Power factor	0.8		
Frequency	Hz	50	
Prime power	KW	280	
Exciter Type	Brushless, self-excitation		
Voltage regulation	%	±0.5	
Protection Grade	IP 23		
Insulation grade	H/H		
Altitude	m	≤1000	

Controller-DEEPSEA

Model		DSE6120MK3
-------	--	------------

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure

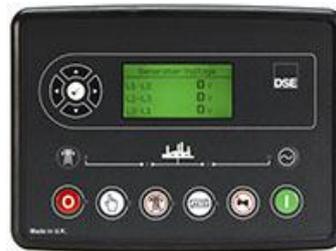

Control Module Options



- Auto generator control module
- Control module with "Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

Standard Features

- Engine(SDEC)
- Radiator 50°C max,fans are driven by bel
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Standard auto control system
- One set of air filter, fuel filter, oil filter
- Main line circuit breaker/MCCB
- Base fuel tank
- Two 24V batteries, rac and cable
- Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)
- User manual

Options

- Battery charge
 - Engine heater
 - Alternator heater
 - PMG
 - Water oil separator
 - Daily fuel tank
 - Remote control panel
 - Automatic transfer switch/ATS
 - Switch box
- Standard: ● Options:○

Warranty*


SDEC Engine

24 months from date of purchase and 3000 hours.

Generator


12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

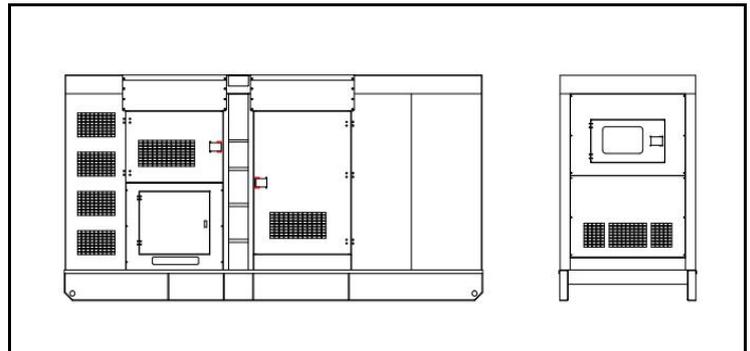

Denyo Silent Type

L*W*H	mm	3100*1100*1800
Weight	kg	3350

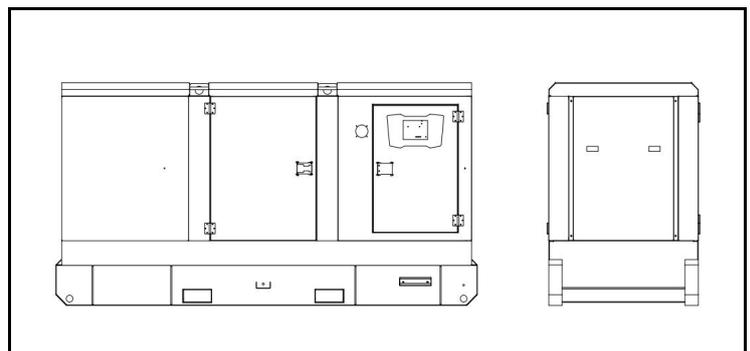

Atlas Silent Type

L*W*H	mm	3988*1400*2250
Weight	kg	4900