

**POWER YOUR FUTURE**

**SDEC Generator  
LG300SD**

**6ETAA11.8-G31**

**Prime Power: 300KW/375KVA**

**Standby Power: 330KW/412.5KVA**



## **GENERATING POWER SOLUTIONS**

### **Increased availability for new operations**

Reliable, robust and versatile generator.  
Ready to deliver power for a next job.

### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

### **Reduced transport and installation costs**

The compact and robust design with integrated transport features enables faster and safer transport and installation.

### **Reduced service & maintenance costs**

Longer service intervals.  
Quicker and more efficient service jobs.

### **Premium resale value**

Designed and built to last.

### **SAFETY**

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

**SDEC Series**

**28KVA--1000KVA**



**FUAN LONGKAI POWER CO.,LTD.**

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel: +86-0593-6309773 Fax: +86-0593-6586988

E-mail: sales@longkaipower.com

Web: www.longkaipower.com

## Technical Data

Model		LG300SD
Rated prime power	kva	375
Rated standard power	kva	412.5
Rated voltage line to line	V	400/230
Rated current	A	541
Maximun sound level	dB(@7m)	100

## Engine-SDEC

Model		6ETAA11.8-G31
Aspiration	Inline, four strokes, four valves, water cooled, pressurized air cooled	
Fuel system	BOSCH	
No. cylinders	6 in line	
Displacement	Liquid	11.8
Bore*Stroke	mm	128*153
Compression ratio	17:1	
Rated speed	r/min	1500
Rated net power(with fan)	Kw	340
Governor type	ECU	
Start Motor	V	24V×5.5kW

## Exhaust System

Exhaust gas flow	m <sup>3</sup> /min	57.5
Exhaust gas temp	°C	600
Max back pressure	kPa	10

## Aspiration System

Max inlet pressure	kPa	6
Air flow	m <sup>3</sup> /min	24.3
Fan consumption	KW	8

## Fuel System

100% load(Prime power)	L/h	79.3
75% load(Prime power)	L/h	59.1
50% load(Prime power)	L/h	37.5
Fuel tank capacity	L	520

## Lubrication System

Oil capacity	L	41
Oil consumption	g/kwh	≤4
Lub. Method	/	
(continuous operation)		

## Cooling System

Coolant capacity	L	23.2
Thermostat operation range	°C	85-95
Max water temperature	°C	104

## Alternator

Model	LONGKAI	LK444E
	STAMFORD	HCI444E-S4L1D-E41/S4L1S-E4
Phase	3	
Voltage	V	400/230
Wiring Type	3 Phase 4 wire, Y type	
Bearing	1	
Power factor	0.8	
Frequency	Hz	50
Prime power	KW	280
Exciter Type	Brushless, self-excitation	
Voltage regulation	%	±0.5
Protection Grade	IP 23	
Insulation grade	H/H	
Altitude	m	≤1000

## Controller-DEEPSEA

Model	DSE6120MK3
-------	------------

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



## Control Module Options



- Auto generator control module
- Control module with "Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

### Standard Features

- Engine(SDEC)
- Radiator 50°C max,fans are driven by bel
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Standard auto control system
- One set of air filter, fuel filter, oil filter
- Main line circuit breaker/MCCB
- Base fuel tank
- Two 24V batteries, rac and cable
- Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)
- User manual

### Options

- Battery charge
- Engine heater
- Alternator heater
- PMG
- Water oil separator
- Daily fuel tank
- Remote control panel
- Automatic transfer switch/ATS
- Switch box
- Standard: ●                      Options:○

### Warranty\*


#### SDEC Engine

24 months from date of purchase and 3000 hours.

#### Generator


12 months from date of purchase or 1000 hours (whichever occurs first).

### Unit Dimensions(Basic unit)

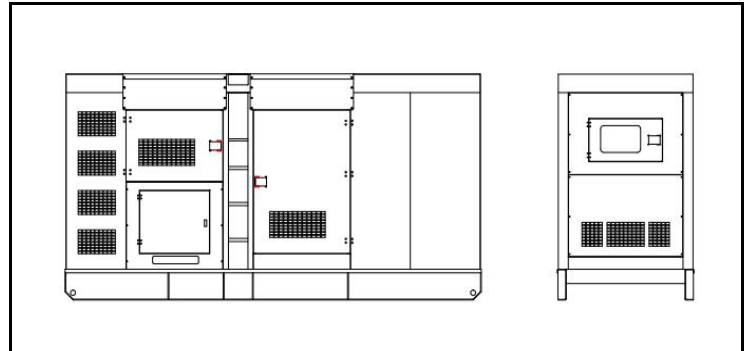

#### Denyo Silent Type

L*W*H	mm	3100*1100*1800
Weight	kg	3350

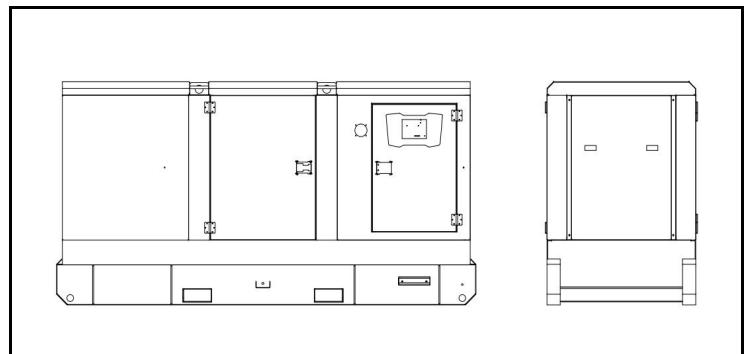

#### Atlas Silent Type

L*W*H	mm	3988*1400*2250
Weight	kg	4900